## MARINE DEPARTMENT NOTICE NO. 11/2025

(Marine Works)

## <u>Dredging Operations</u> at Kwai Tsing Container Terminals 4, 8 and 9 (North)

With immediate effect and for a period of approximately six months, dredging operations will be carried out in the following works areas:

**Works Area 1**: This area is bounded by straight lines joining the following co-ordinates (WGS 84 Datum) from (A) to (H): -

(A)	22°19.802'N	114°08.042′E
(B)	22°19.673'N	114°08.086'E
(C)	22°19.456'N	114°07.348'E
(D)	22°19.574'N	114°07.494'E
(E)	22°19.561'N	114°07.498'E
(F)	22°19.593'N	114°07.609'E
(G)	22°19.651'N	114°07.589'E
(H)	22°19.680'N	114°07.626′E

**Works Area 2:** This area is bounded by straight lines joining the following co-ordinates (WGS 84 Datum) from (I) to (L) and the adjacent shoreline: -

(I)	22°20.358'N	114°07.733'E
(J)	22°20.255'N	114°07.384'E
(K)	22°20.438'N	114°07.321'E
(L)	22°20.446'N	114°07.350'E

**Works Area 3:** This area is bounded by straight lines joining the following co-ordinates (WGS 84 Datum) from (M) to (P) and the adjacent shoreline: -

(M)	22°20.686'N	114°06.781'E
(N)	22°20.694'N	114°06.808'E
(O)	22°20.333'N	114°06.930'E
(P)	22°20.325'N	114°06.903'E

- 2 -

2. The works will be carried out by one grab dredger and three hopper

barges. Two tugboats and one survey boat will provide assistance. The number of vessels engaged in the works will change from time to time to suit

operational requirements. Vessels engaged in the works will display signals as

prescribed in international and local regulations.

3. A working area of approximately 50 metres around the grab dredger will be established. Vallow marker buoys fitted with vallow flashing lights will

will be established. Yellow marker buoys fitted with yellow flashing lights will be laid to mark the positions of the anchors extending from the working vessels.

4. A silt curtain, extending from the sea surface to the seabed, will be

established beside the grab dredger. The silt curtain is a large piece of netting

used to contain mud and sediments. Yellow flashing lights will be laid to mark

the extent of the silt curtain.

5. The hours of work will be round-the-clock.

6. Vessels navigating in the vicinity should proceed with caution.

7. A drawing showing the works areas is attached to this Notice.

Mr. S.F. WONG

**Director of Marine** 


Marine Department

Government of the HKSAR

Date: 21 January 2025

Action File Ref.: L/M. No. 23/24 in MD-PD&PS-F01-075-01A-002-P022

## 海事處佈告第 11/2025 號附圖 Drawing Attached to Marine Department Notice No. 11/2025

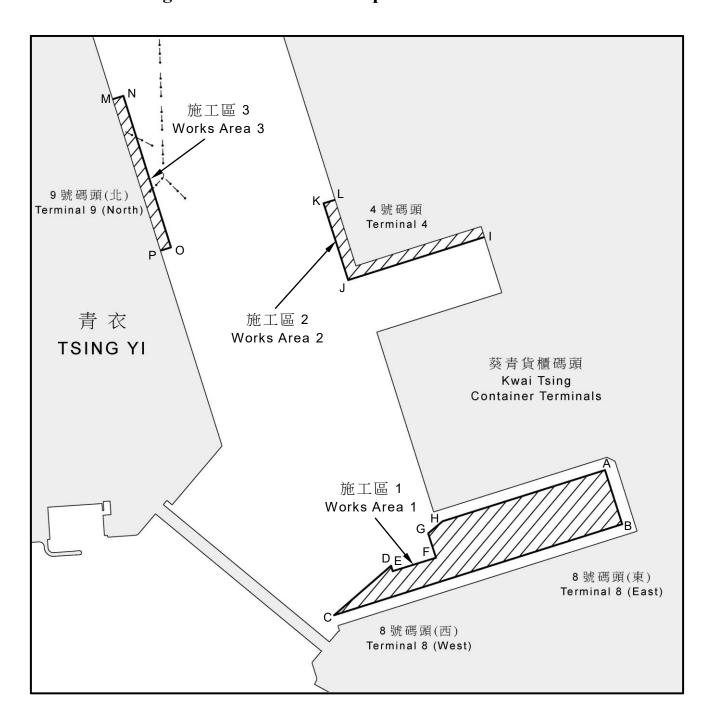

不宜作航行用途 NOT TO BE USED FOR NAVIGATION